

DX series touch panel



DX8



1. Technical Specs:

DX8 RGBW Touch Panel

- Input Voltage: 100~240VAC
- Output Signal: RF 2.4G + DMX512
- RF Remote Distance: 30m
- Control Mode: 4 Zones Control

- Working Temperature: -20°C~60°C
- Package Size: L113×W112×H50(mm)
- Weight(N.W.): 225g


R4-5A CV Receiver

- Input Voltage: 5~24VDC
- Max Current Load: 5A × 4CH Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g


R4-CC CC Receiver

- Input Voltage: 12~48VDC
- Output Voltage: 3~46VDC
- Output Current: CC 350/700/1050mA×4CH
- Output Power: 1.05W~48.3W×4CH Max 193.2W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g

2. Product Size:




R4-5A/R4-CC Receiver




Touch Panel

3. Installation Instruction:




Install



Uninstall

4. Key Functions:

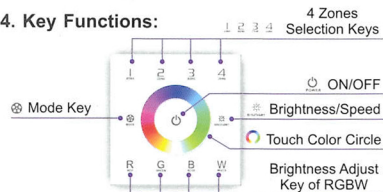

* Long press to turn on/off the buzzer.

5. Terminals:

